



# Dell Latitude D620 Display Replacement

Written By: Miguel Wong



## INTRODUCTION

Guide to separating the display from the body of the laptop.

---




### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [Spudger](#) (1)
-


## Step 1 — Keyboard



 Power down the laptop and remove the battery.

- Open the laptop cover all of the way.


## Step 2

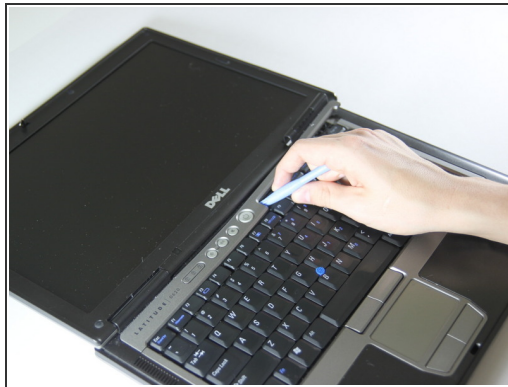

- Locate the notch under the cover at the top of the keyboard
- Using the spudger as a lever, lift the plastic covering
- Carefully remove the rest of the covering from right to left



### Step 3

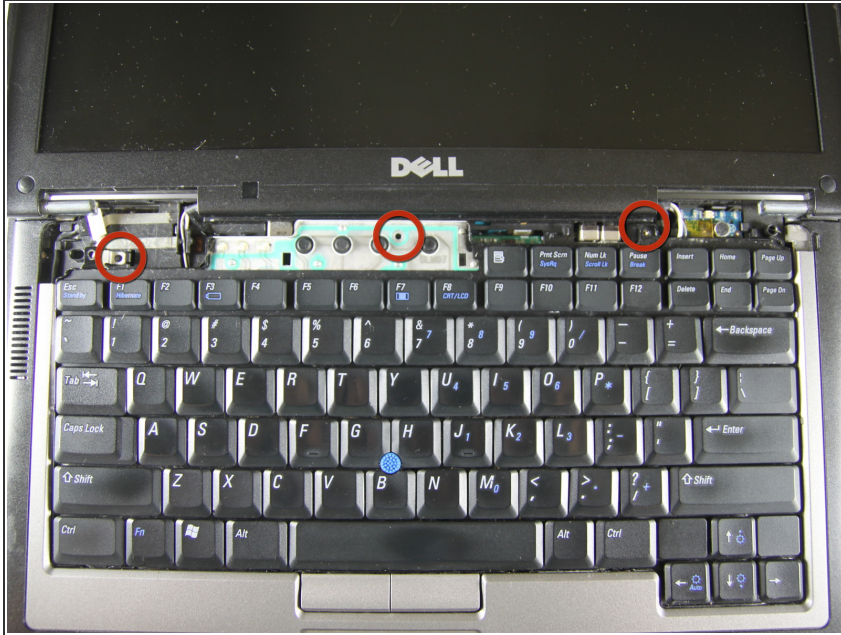

- Unscrew the top portion of the keyboard using a #00 screwdriver

### Step 4



- Hold keyboard from the top and gently pull towards the LCD screen to remove the keyboard from the case



⚠ Don't pull on the keyboard too forcefully because it is attached to the motherboard with a short, thin ribbon cable

## Step 5



- Once keyboard is out of the case, lay it face-down on the track pad


## Step 6

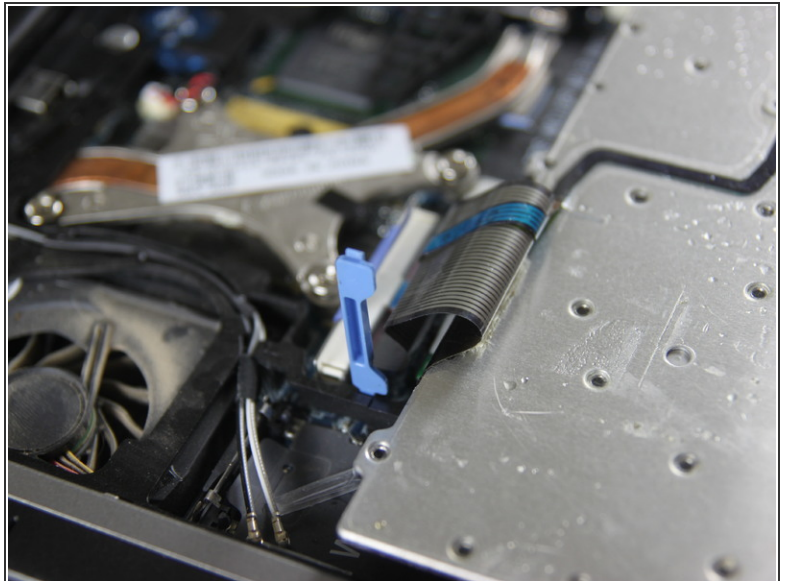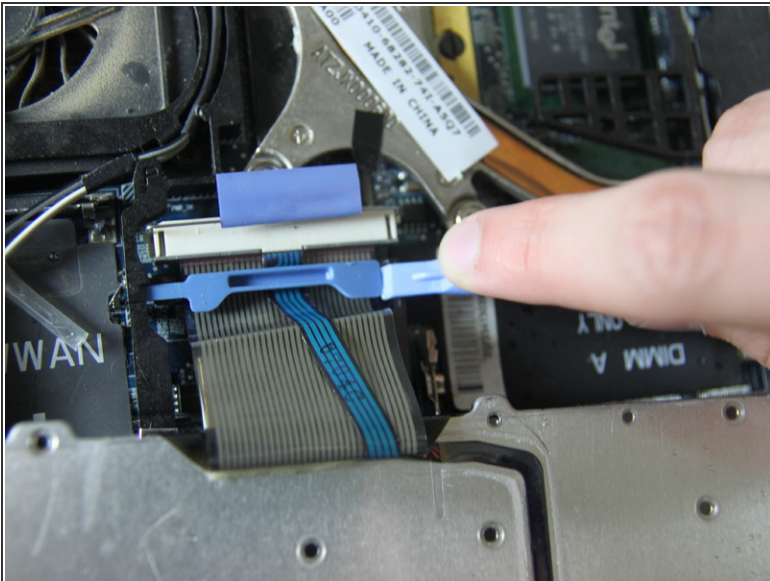

- Using a small spudger, pull back on the black bar to release the blue lever



## Step 7

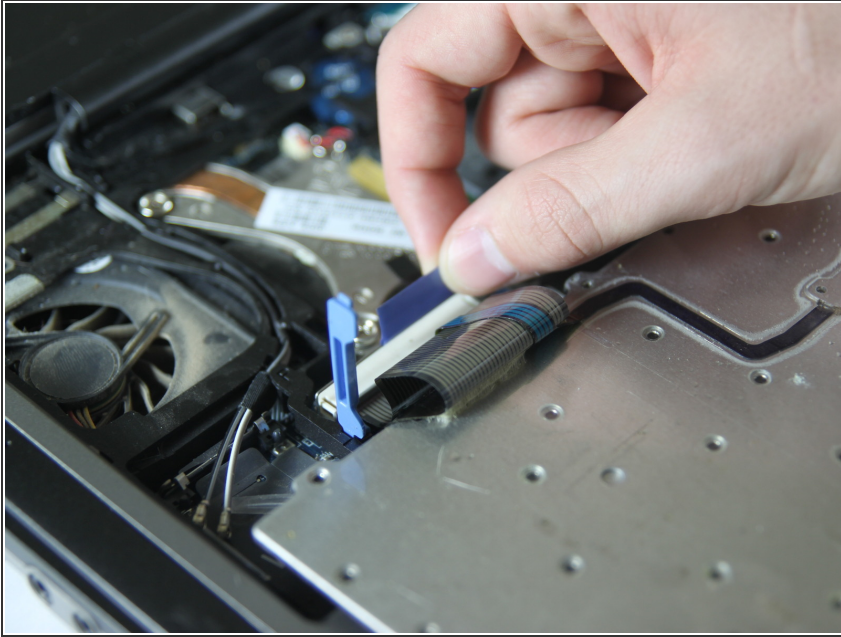


- Pull up on the metal bar connected to the socket to detach the ribbon cable

## Step 8 — Display



- Detach cables that connect the display to the body of the laptop

## Step 9

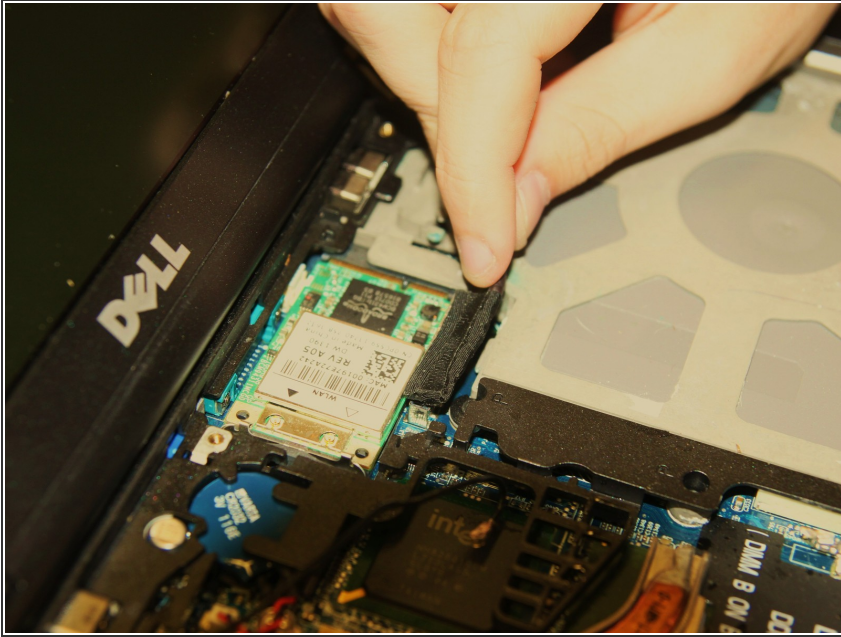

- Disconnect the black cable attached to the motherboard

## Step 10



- Close the laptop lid
- Turn the laptop over onto its backside
- Unscrew the two screws shown in the picture using a #00 screwdriver



## Step 11



- Face the laptop's back ports towards you
- Unscrew the two screws labeled in the picture using a #00 screwdriver

## Step 12



- Turn the laptop over again so it's right-side up
- Open the display, and pull the display up and out of the laptop's body



## Step 13



- Remove the circular rubber pads as outlined in the picture using a spudger

## Step 14



- Unscrew the screws that were under the rubber circles using the #00 screwdriver


## Step 15



- Carefully use a spudger to work around the edge of the screen to lift off the plastic cover

⚠ Be very careful while doing this as the plastic snaps easily


## Step 16

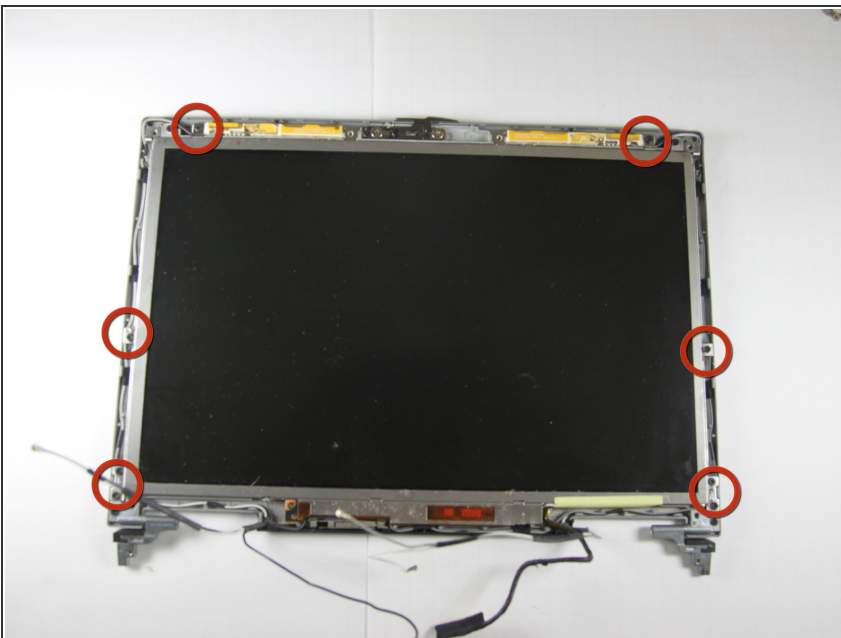

- Remove the screws outlined in the picture



## Step 17

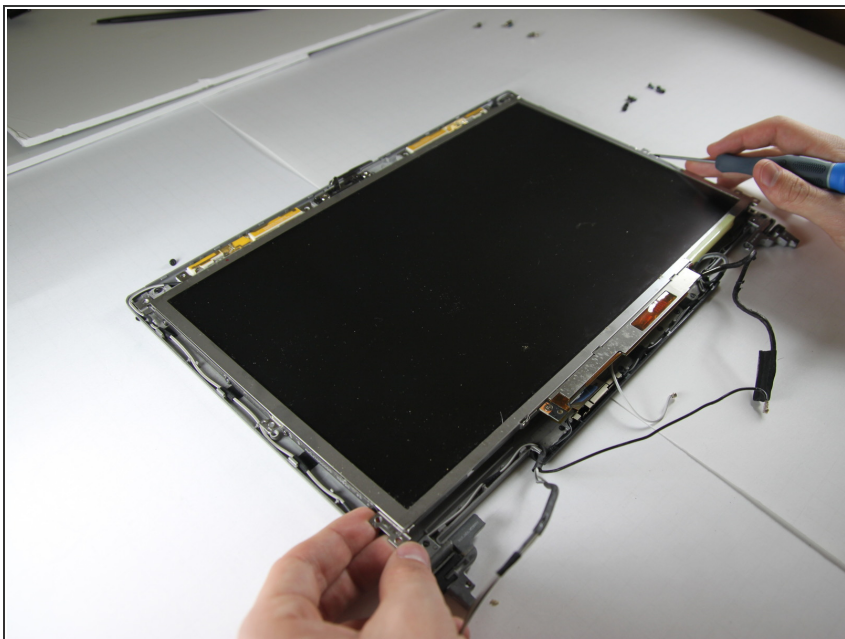

- Carefully lift the LCD screen out of its casing

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 07:11:36 AM.